

VALLEY SEAL

Product Data Sheet




Specifications and Applications

Manufacture: Polyurethane impregnated with water based bitumen emulsion (Non Flammable).

Application: Valley Seal is a compressible bitumastic strip used to seal the valleys. It prevents water and vermin from entering the roof space through the valley line. It is supplied in lengths and fitted to the valley iron before the tile cuts are positioned.

When the cuts are lain onto Valley Seal it compresses and forms a seal that reduces the possibility of storm run off overflowing the valley. Being bitumen impregnated Valley Seal actually adheres valley cuts to the valley iron. Valley Seal is a low maintenance product that should last the life of the valley.

Testing: Tested at CSIRO North Ryde NSW - Dynamic Weather Resistance Test DTR 162 CSIRO Division of Building, Construction and Engineering Report FNE 6050.

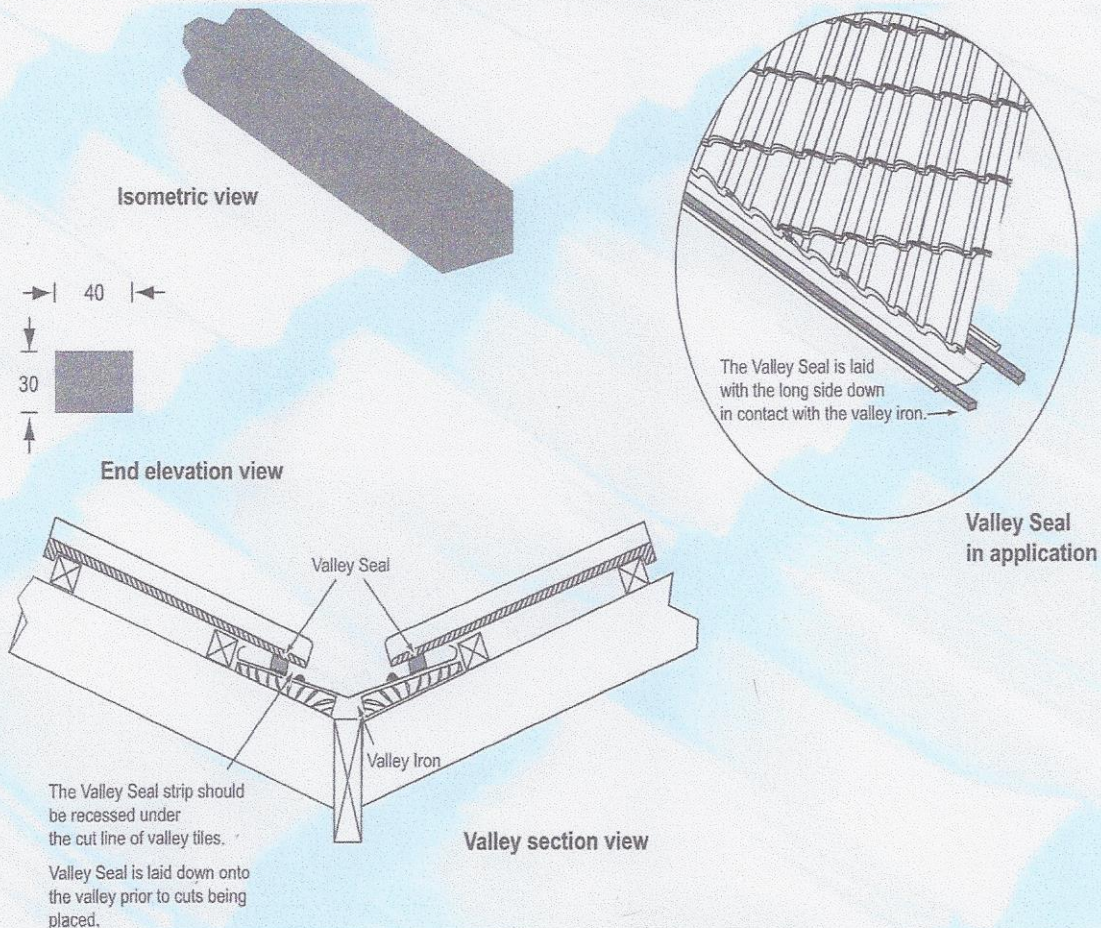

www.apklroofing.com.au

p: 38290400

f: 38291400

e: apandkl@ankar.com.au